



bomaksan[®]
INDUSTRIAL AIR FILTRATION SYSTEMS



PKF SERIES
JET-PULSE MODULAR CARTRIDGE
DUST COLLECTOR



GENERAL FEATURES



MODULAR

Bomaksan branded PKF Jet-Pulse Dust Collector has a modular structural design. Thus when you need to increase your filter capacity, you can directly add a PKF device to your system without replacing the old one.



DURABLE & LEAK PROOF

Side and upper doors of cabin, makeup profile, chassis and carrying legs are produced with sufficient plate thickness and leak-proof is ensured by press inflection unifying with a nut.



EASY INSTALLATION

Thanks to it's special design, Bomaksan branded PFK Jet-Pulse Dust Collector is shipped to your factory as ready to be setup and easily put to use.



FLEXIBILITY

Bomaksan branded PKF Jet-Pulse Dust Collector may be re-designed by Bomaksan engineers by considering your factories settlement plan and provides the most suitable solution.



AUTO CLEANING SYSTEM

Thanks to it's high efficient automatic cleaning system designed by Bomaksan engineers as part of an R&D project, while the consumption of compressed air is decreasing, the life and performance of filters increases.



EASY MAINTENANCE

Bomaksan branded PKF Jet-Pulse Dust Collector gives you the chance to change dust bin discharge and filter easily due to its ergonomic design.

APPLICATIONS



Metalworking



Pharmaceutical



Food



Plasma/Laser Cutting




Powder Coating





Welding

HIGHLIGHTS

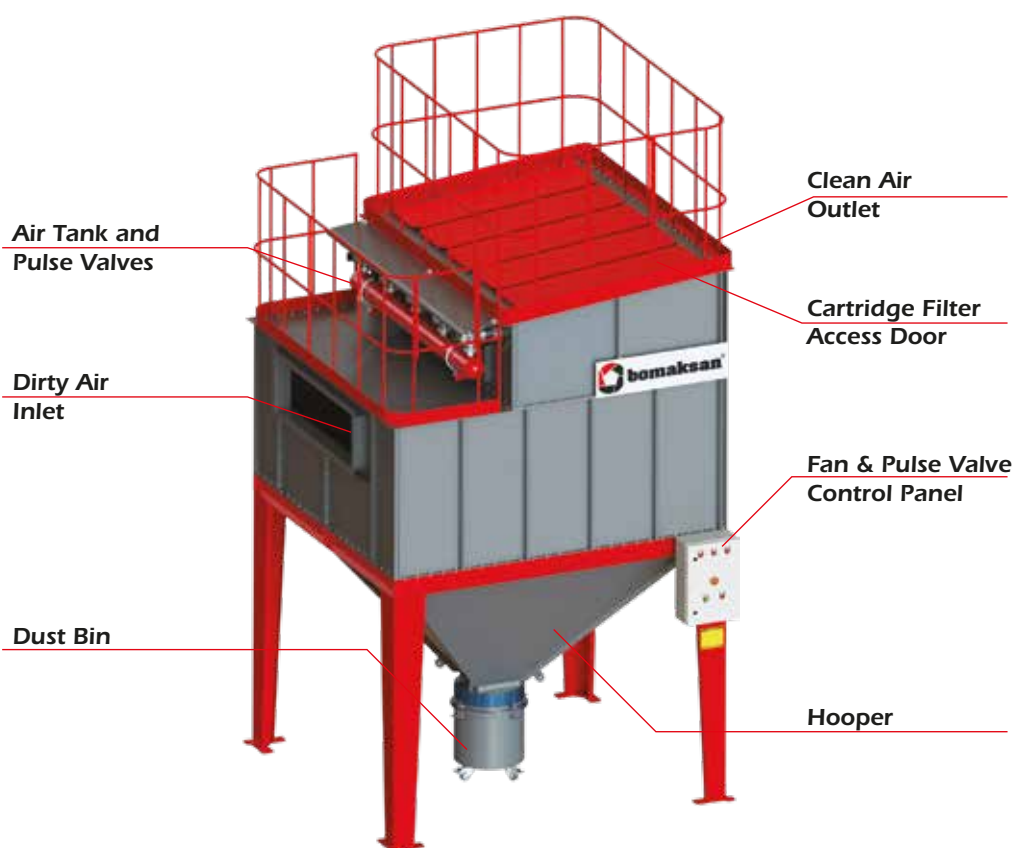

HOW IT WORKS?

FILTER CLEANING

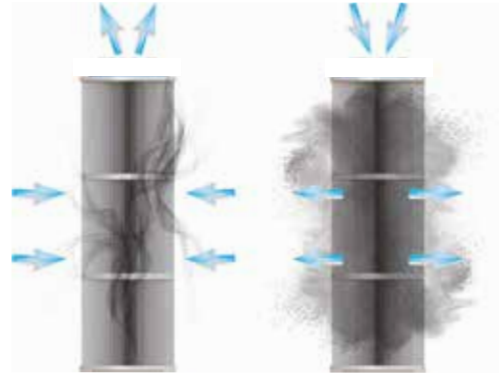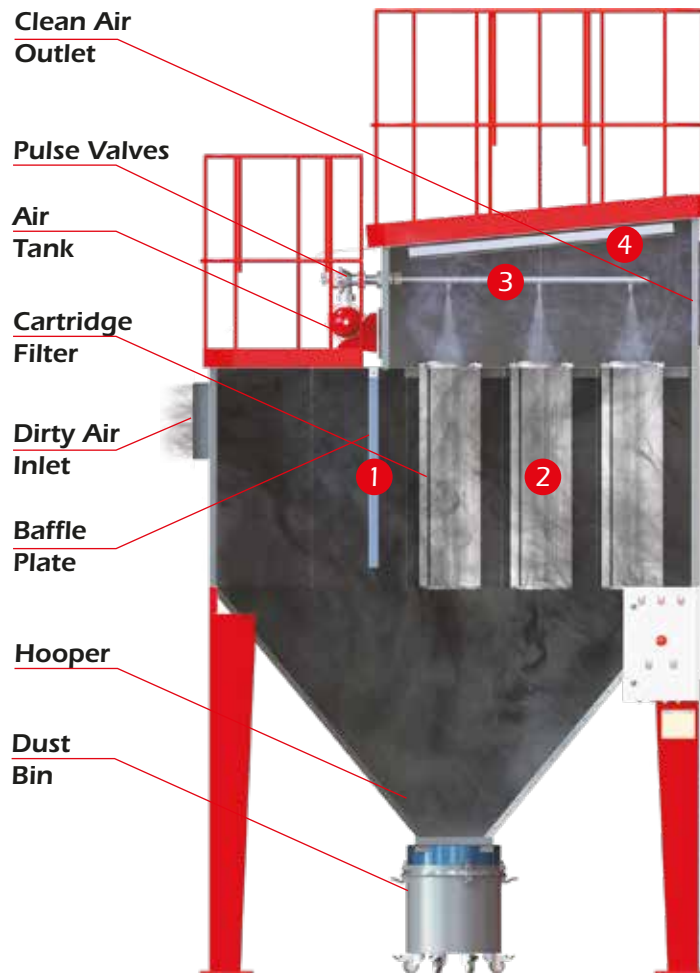

- 1 Heavy particles carried by dirty air (such as spark, big and abrasive particles and so on) are directed to bunker via flapper.
- 2 Light particles in dirty air rise in filter cabin and are hold by cartridge filters.
- 3 Cartridge filters are cleaned by pulse valves with compressed air, after differential pressure sensitive pulse valve controller detects the pollution level of filters.
- 4 Clean air coming from cartridge filters is released to indoor or atmosphere.

SAMPLE INSTALLATION



STANDARD ACCESSORIES

● RADIAL FAN

Targeted to satisfy requested flow and pressure, centrifuge type, conforming the standards and with its' direct drive motor its' produced to work quite and vibration free. Fan motor are made by steel as standard and balanced dynamically and statically on specialized plants.



● PULSE VALVE & AIR TANK

Pulse Valves are made by aluminum cast and 1½" sized. They perform with 24V DC standard voltage. Air tank is produced conforming to compressed container technique and adequate to store the air between two valves.



● FAN CONTROL PANEL

The panel containing thermal switch controlling ventilator engine, contactor, engine protection relay and working/warning lights.



● CARTRIDGE FILTER

80% Cellulose 20% Polyester blend media with nanofiber coated cartridge filters (F9 Class) are used as standard in ECO series. Thanks to the special PLEAT-LOCK pleating technique, pleat spacing is always equal.

(For more details page 4)



● SEQUENCER (dP Control)

It analyzes differential pressure occurs due to pollution of filters digitally and controls pulse valves. Covered with IP 65 class, made by ABS, water- and dust-proof case.



● DUST BIN

Dust bin accumulate the dust filtered by cartridge filters. Bomaksan branded dust bins are easy to plug and remove thanks to their brand new fitting equipment.



OPTIONAL ACCESSORIES

● ROTARY VALVE

When the dust density of dirty air getting into the collector is high, rotary valve empties the dust continuously from the unit. It is made by cast block with an outer ball bearing, engine and reductor.



● COMP. AIR REGULATOR

It regulates the pressure of the compressed air from compressor and ensures it has been forwarded to air tank as dry, thus the filter cleaning pressure is kept under control and safety of filters is guaranteed.



● SILENCER

Produced cylindrically to absorb the air noise of ventilator outlet.



EX-PROOF ACCESSORIES

● EXPLOSION VENT

ATEX certificated explosion door is used, which is produced by stainless steel.



● PILOT BOX & EX-PROOF COILS

Remote box keep electrical equipments of pulse valves out from explosive and dangerous areas. It also prevents electronic equipments from harsh environment.



● EX-PROOF FAN and MOTOR

ATEX certificated ex-proof motor and fan are used, which are suitable for different capacity requirements





According to DIN EN 60335-2-69 standards, in 0,5 - 2 μ sized M-Class particles it has a filter efficiency up to 99%.



Easy filter replacement from clean air side without facing any contaminated air.




It provides extended use without losing filtration efficiency.

In Bomaksan branded PKF series jet-pulse dust collector, highly efficient nanofiber coated, flame retardant, 80/20 cellulose/synthetic, F9 filter media is used as standard. With its' superior PLEAT-LOCK pleating technique it's guaranteed the pleating sizes have been equal and better filter cleaning is ensured. Due to its' plate design, it can be assembled and disassembled easily.


Bomaksan engineers offer the most suitable filter material for all applications and dust types. Some filter materials considering factors such as density of dust, humidity proportion, if the dust has a potential to be loaded statically and so on are as follows;

- polyMIGHT 55: %100 spunbond non-woven polyester
- polyMIGHT HO 55: Hydrophobic coating over polyMIGHT 55
- polyMIGHT ALU: Aluminium coating over polyMIGHT 55 (Antistatic)
- polyMIGHT PTFE 65: ePTFE membrane over polyMIGHT 55 (H13 efficiency)
- polyMIGHT ALU PTFE: ePTFE membrane over polyMIGHT ALU (Antistatic)
- nanoBLEND FR: %80 Cellulose %20 Polyester blend with nanofiber coating

SURFACE FILTRATION




On the contrary to traditional filters, filters made by non-woven polyester performs the filtration not in the filter but on the surface. Therefore;

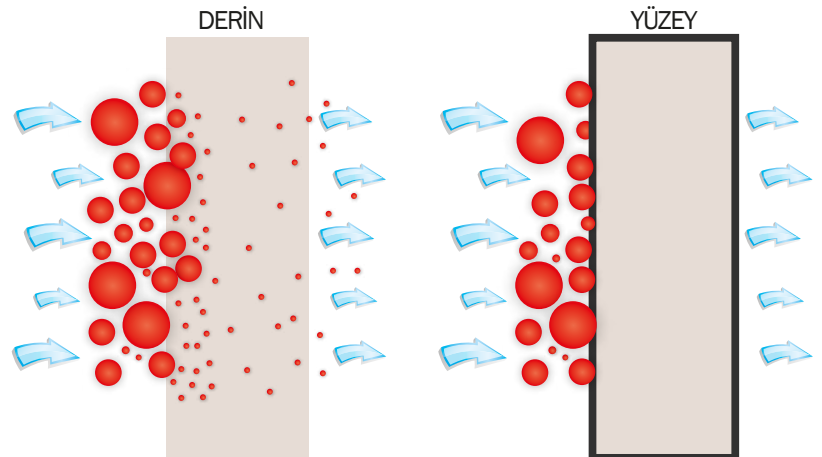

- The penetration of dust inside the filter is prevented and filter life is extended
- Less differential pressure is produced and required compressed air consumption for cleaning process is decreased
- Higher filtration efficiency is provided


Bomaksan branded PKF Jet-Pulse Dust Collector is designed studiously by Bomaksan engineers. Data taking place in the tables is prepared for you to choose the PKF model best suited for your needs. Please contact with your Bomaksan Sales Representative to have further informations about our products.

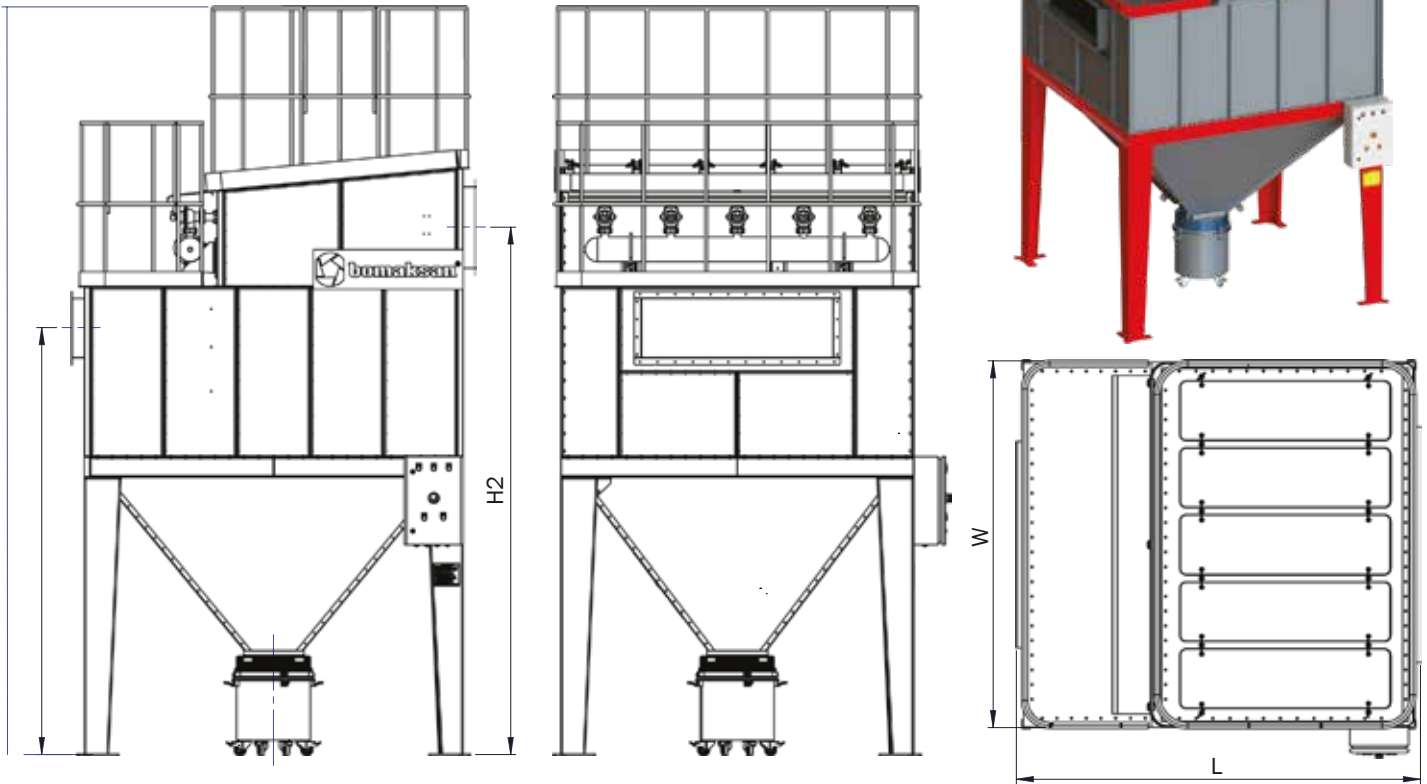

TECHNICAL FEATURES

MODEL	PKF-4	PKF-6	PKF-9	PKF12	PKF-15	PKF-18
Cartridge Filter (unit)	4	6	9	12	15	18
Total Filtration Area (m2)	80	120	180	240	300	360
Filter Material	NanoBlend FR	NanoBlend FR	NanoBlend FR	NanoBlend FR	NanoBlend FR	NanoBlend FR
Fan Capacity (m3/h)	2.000 - 5.000	3.000 - 7.500	4.500 - 11.000	6.000 - 15.000	7.500 - 19.000	9.000 - 22.500
Filtration Velocity (m3/m2/h)	0,42 - 1,05	0,42 - 1,05	0,42 - 1,02	0,42 - 1,05	0,42 - 1,05	0,42 - 1,04
Pulse - Valve (type - unit)	1 1/2" - 2	1 1/2" - 3	1 1/2" - 5	1 1/2" - 6	1 1/2" - 8	1 1/2" - 9
Compressed Air Req.(bar)	4 - 6	4 - 6	4 - 6	4 - 6	4 - 6	4 - 6
Power Supply (V ve Hz)	350V - 50Hz	350V - 50Hz	350V - 50Hz	350V - 50Hz	350V - 50Hz	350V - 50Hz
Operating Temperature (oC)	0/80 Kuru Hava	0/80 Kuru Hava	0/80 Kuru Hava	0/80 Kuru Hava	0/80 Kuru Hava	0/80 Kuru Hava
Cabin Comp. Strength (Pa)	Max. 5000	Max. 5000	Max. 5000	Max. 5000	Max. 5000	Max. 5000
DIMENSIONS	PKF-4	PKF-6	PKF-9	PKF12	PKF-15	PKF-18
Width (W) (mm)	1.280	1.600	2.100	2.100	2.500	3.120
Length (L) (mm)	1.900	2.240	2.495	2.980	2.985	3.025
Height (H) (mm)	2.850	3.060	3.540	3.565	3.935	4.030
1st Modula Height (H1) (mm)	1.920	2.780	2.470	2.440	2.745	2.765
2nd Modula Height(H2) (mm)	2.570	2.990	3.140	3.130	3.505	3.625

*Bomaksan reserves the right to change or modify the details in the list at any time.

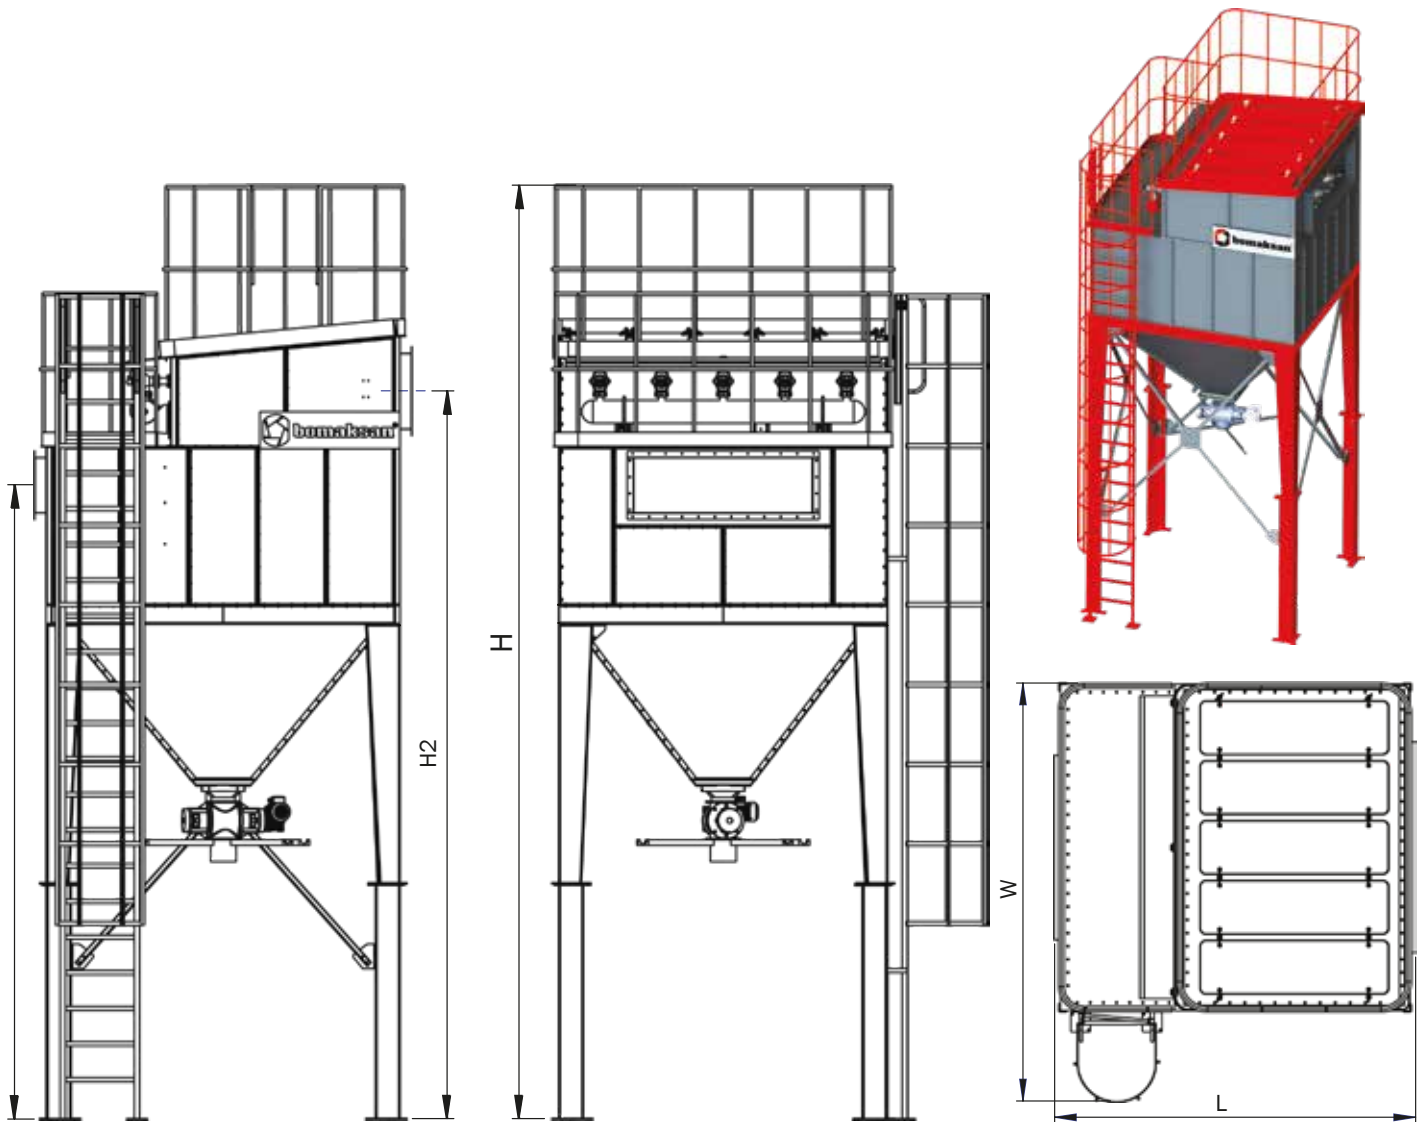


DIMENSIONS

MODEL	PKF-4	PKF-6	PKF-9	PKF-12	PKF-15	PKF18
Width (W) (mm)	1.980	2.300	2.800	2.800	3.300	3.820
Length (L) (mm)	1.900	2.240	2.355	2.750	2.750	2.750
Height (H) (mm)	5.270	5.700	6.250	6.325	6.570	6.585
1st Modula Height (H1) (mm)	3.360	3.640	4.090	4.080	4.285	4.230
2nd Modula Height(H2) (mm)	4.020	4.440	4.760	4.785	5.060	5.085

*Bomaksan reserves the right to change or modify the details in the list at any time.

MODULAR SYSTEM INSTALLATION

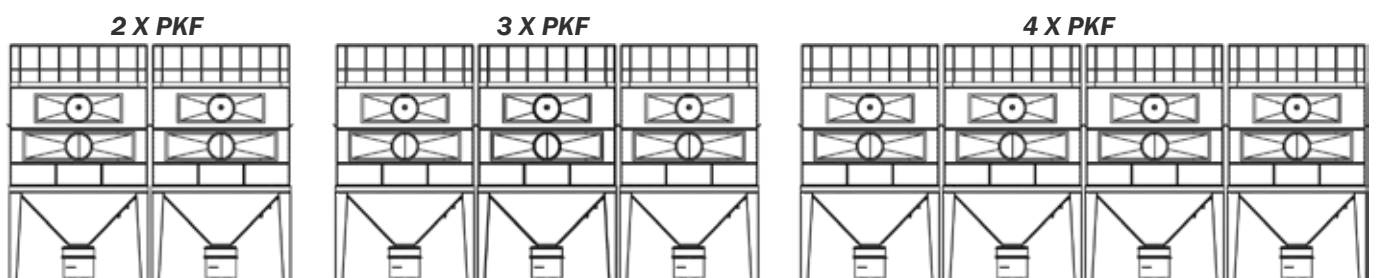



bomaksan[®]

INDUSTRIAL AIR FILTRATION SYSTEMS



RELIABLE • SUSTAINABLE • EXPERIENCED • GLOBAL • QUALIFIED

Authorized Reseller



Due to improvement on products, Bomaksan reserves the right to change or modify all information taking place in this brochure at any time without any prior notice

Web: www.bomaksan.com
Mail: export@bomaksan.com